

Materialprüfungsamt Nordrhein-Westfalen

Prüfen • Überwachen • Zertifizieren

**Certificate of conformity of the factory production control
0432-CPR-900182**

Version 01

In compliance with Regulation 305/2011/EU of the European Parliament and of the Council of 9 March 2011 (the Construction Products Regulation or CPR), this certificate applies to the construction product

Chimneys - System Chimneys with plastic flue liners according EN 14471**M&G System Chimney**

produced by or for

Muelink & Grol B.V.

Duinkerkenstraat 27
9723 BP Groningen
the Netherlands

and produced in the manufacturing plant(s)

Muelink & Grol B.V.

P.O. Box 509
9700 AM Groningen
the Netherlands

Burgerhout B.V.

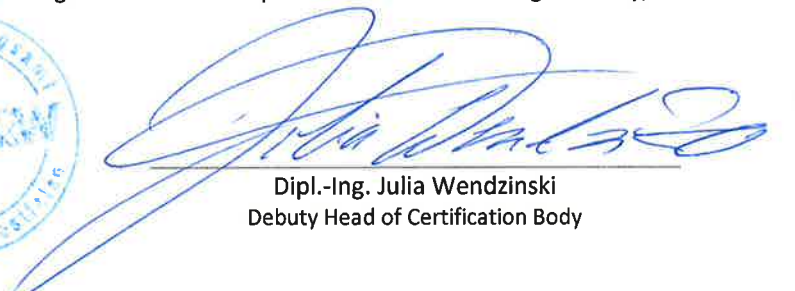
P.O. Box 77
9400 AB Assen
the Netherlands

This certificate attests that all provisions concerning the assessment and verification of constancy of performance described in Annex ZA of the standard

EN 14471: 2013under **system 2+** are applied and that**the factory production control fulfils all the prescribed
requirements set out above.**

This certificate was first issued on 30.04.2015 and will remain valid as long as the test methods and/or factory production control requirements included in the harmonised standard, used to assess the performance of the declared characteristics, do not change, and the product, and the manufacturing conditions in the plant are not modified significantly, or latest on 29.04.2020.

Dortmund, 30.04.2015

Dipl.-Ing. Julia Wendzinski
Deputy Head of Certification Body

This Certificate consists of 1 page and 1 annex.

This Certificate replaces the Certificate no. 0432-CPR-220556 dated 14.07.2011.

The original of this document was issued in German language. In case of doubt only the
German version is valid.

Chimneys - System Chimneys with plastic flue liners according EN 14471
M&G System Chimney

Manufacturer: Muelink & Grol B.V.

P.O. Box 509
 9700 AM Groningen
 the Netherlands

PP sections, fittings, and terminals

0.1	<i>(Dn 60-150)</i>	<i>(rigid, single)</i>	<i>(flue)</i>	T120	H1	W 1/2	O(30)	I	E	L
0.2	<i>(Dn 60-150)</i>	<i>(rigid, single)</i>	<i>(flue)</i>	T120	H1	W 1/2	O(30)	E	E	L
0.3	<i>(Dn60/100-150/220)</i>	<i>(rigid, conc.)</i>	<i>(flue/air)</i>	T120	H1	W 1/2	O(00)	E	E	L0
0.4	<i>(Dn 60-130)</i>	<i>(flex, double)</i>	<i>(flue)</i>	T120	H1	W 1/2	O(30)	I	E	L
0.6	<i>(Dn 60-80)</i>	<i>(flex, conc.)</i>	<i>(flue/air)</i>	T120	H1	W 1/2	O(00)	I	E	L1
0.8	<i>(Dn 200)</i>	<i>(rigid, single)</i>	<i>(flue)</i>	T120	P1	W 1/2	O(30)	I	E	L